



NTH 70

Brine removal system

Into the box




Brine removal from water softening units
mm 540 x 230 x H 450



NTH 70 is for the removal of brine from water softening units, when these are installed below the local backflow level. The best solution against the aggressivity of brine with salinity of appr. 27%. Plug-in ready.

- Seal-less pump
- Open impeller
- Pump and tank made of corrosion resistant plastic

Code	Article	Description
SP0409SHA70	NTH 70	Brine removal pump

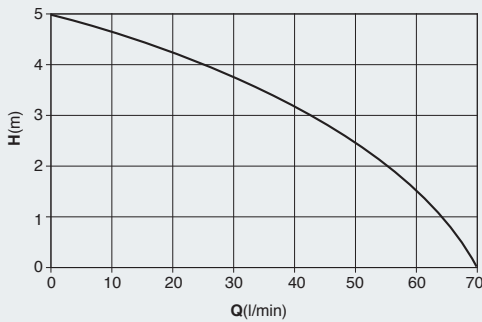

Technical data

- Max flow 70 l/min
- Max head 5 m
- Voltage 230V - 50Hz
- Absorption 110 W
- Weight 5 Kg
- Tank capacity 13 l
- Non return valve included Ø 3/4"
- Power cable with plug 3 m
- Brine 27% NaCl
- Protection class IP20
- Pump body and impeller PBT
- Certification C E
- RoHS 2 compliant

Example of installation

- 1- brine removal pump
- 2- Water softening unit

